




SK24V150PH

LITHIUM IRON PHOSPHATE BATTERY

Drop-In Replacement LiFePO4 Battery

- Gas Aerosol Fireproof
- IP67 waterproof
- Bluetooth
- Victron Communication
- 4000+cycle Life
- Self-Heating
- Excellent Heat Dispersion
- LED soc indicator
- ON/OFF Switch

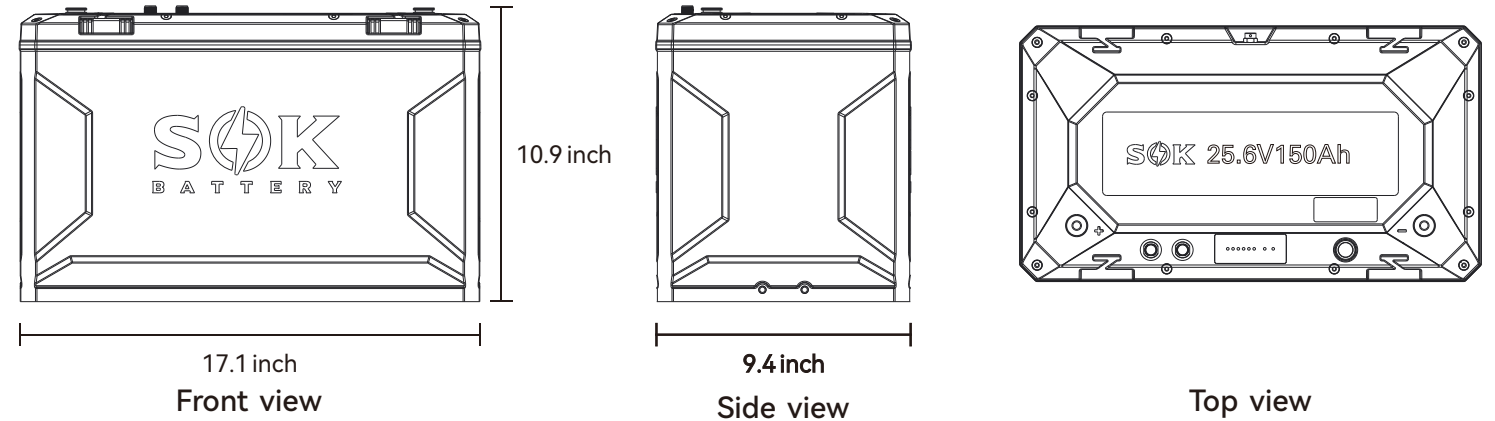

ELECTRICAL PERFORMANCE

Nominal Voltage	25.6V
Nominal Capacity	150Ah
Energy	3840Wh
Self Discharge	<3% / Month
Cells	3.2V 150Ah Cell(>4000cycles)

TEMPERATURE PERFORMANCE

Discharge Temperature	-4 ~ 140 °F (-20 ~ 60°C)
Charge Temperature	4 ~ 122 °F (-20 ~ 50°C)
Storage Temperature	23 ~ 95 °F (-5 ~ 35 °C)
BMS High Temperature Cut-Off	Discharge 167 °F (75 °C) Charge 158 °F (70 °C)
Reconnect Temperature	Discharge 149 °F (65 °C) Charge 140 °F (60 °C)

CHARGE PERFORMANCE

Recommended Charge Current	150A
Maximum Charge Current	200A
Recommended Charge Voltage	<29.2V
BMS Charge Cut-Off Voltage	>30V or 3.8V(Cell)
Reconnect Voltage	<27.6V
Balancing Voltage	3370mV and >30mV @ charge
Maximum Batteries in Series	2
Maximum Batteries in parallel	10

MECHANICAL PERFORMANCE

Dimension (L x W x H)	17.1*9.4*10.9inch
Approx. Weight	70lb
Terminal Type	M8
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	PC+ABS
Enclosure Protection	IP67

COMPLIANCE

Certifications	UL1973,UL9540A,IEC62619 for cells MSDS for shipping UN38.3
----------------	---

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.



86 139 2800 2860



WWW.SOKBATTERY.COM



SALES@SOKBATTERY.COM

DISCHARGE PERFORMANCE

Maximum Continuous Discharge Current	200A
Peak Discharge Current	500A, 10s
Recommended Low Voltage Disconnect	≥21V
BMS Discharge Cut-Off Voltage	<20V
Reconnect Voltage	>24V
Short Circuit Protection	1200A, 300us