


Technical Parameters

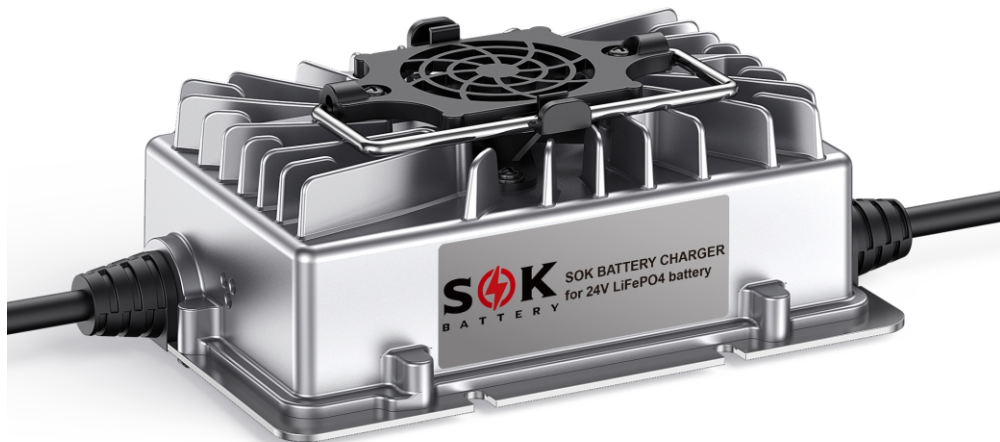

Model	SK24V10A
Input voltage	90Vac to 264Vac / single phase
Input Frequency Range	47Hz ~ 63Hz
Max Efficiency	≥ 89%
Constant Voltage Output	29.2 ± 0.2V
Output Current Limit Range	9A ~ 11A
Input Frequency Range	47Hz ~ 63Hz
Max Output Voltage	29.2V
Protection	(1) Hardware Over Voltage Protection: When the output voltage exceeds 29.2V; (2) Short Circuit Protection
Operating Temperature	-20 ~ +45°C
Storage Temperature	-25 ~ +85°C
Life Time	≥ 15,000 hours at 25°C ambient temperature, Full load and nominal input condition.

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.